

SPECIFICATIONS

WFA HiFlow® Harshwater Inline Water Filter System

K-T-HWHIFLOW

Now offers improved sediment and limescale reduction and increased capacity to over 56,000 litres per annum.

Proprietary filter head technology: **filter cartridge warranted to fit and compatible with all existing HiFlow installations.**



WaterMark

AS3497

Lic. WM-032108

IAPMO R&T OCEANA



MADE IN
USA



ASSEMBLED IN
AUSTRALIA

WaterFilters
AUSTRALIA

hiflowwaterfilters.com.au

WFA HiFlow® Harshwater Inline Water Filter System

K-T-HWHIFLOW

SPECIFICATIONS

Capacity	56,700 litres
Service life/change cartridge	12 months*
Working Pressure	70-500 kPa
Temperature	2-38°C
Height to allow for cartridge change	460mm
Width of filter head/cartridge	225mm
Flow Rate	6.3 Lpm
Micron Rating	5 microns

*Service life will vary according to flow rate, influent line pressure and local water conditions.

PERFORMANCE

Certified to remove/reduce:

- Sediment
- Chlorine
- Bad taste and odours
- Limescale

INCLUSIONS

- WFA Filter Head with Mounting Bracket
- Dual Check Valve
- Pex Hose 650mm 1/2" female to 3/8" male*
- Brass Hex Nipple 3/8" male to 1/2" male*
- Plumbing Tape
- WFA HiFlow-HW (for Harsh water) Cartridge
- Stabilizing Bracket
- Mounting Screws
- Owners Manual


*Both parts include a sealing 'O' ring

CARTRIDGE RE-ORDER CODE

C-T-HWHIFLOW

Compatible with: HF4CB5K-RC

VERTICAL OR HORIZONTAL INSTALLATION

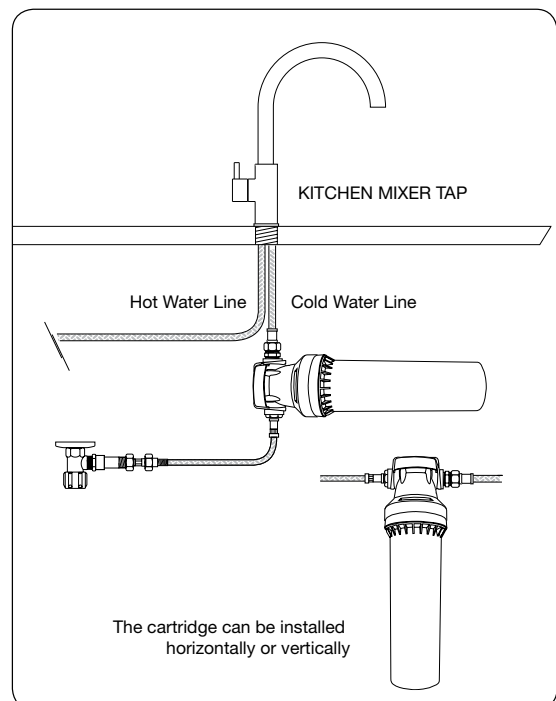

WaterFilters
AUSTRALIA
hiflowwaterfilters.com.au

To find out more call us on 02 9905 6211
Or if you prefer, you can email us at sales@wfa.com.au

HiFLOW® is a registered trademark of Water Filters Australia Pty Limited